

HELLUX 456

True to detail: Historical luminaire with newest LED technology

Flexible: Thanks to modern lighting solutions the series is suitable for many different tasks

Maintenance friendly: Few or no maintenance work necessary

Application areas:

- Roads in residential areas
- Historical places
- Parks




HELLUX

HELLUX 456



Example of luminous intensity distribution:

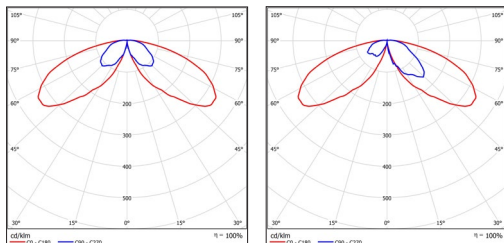

LIGHT HOUSING		
Material	Aluminium	
Colour (powder coating)	RAL oder DB	
Mounting type	Post top mounting (Ø 76 mm) / Traditional cast post	
Orientation possibilities	—	
Dimensions	450 x 450 x 795 mm	
Weight	app. 10 kg	
Exposed wind surface	0,22 m ²	
IP Protection class	IP 54	
Glas type	PMMA (transparent structured opal)	
Impact resistance	IK 08	
ILLUMINANT PROPERTIES		
Light source	Gas lights mantle imitation with Mid-Power-LEDs	LED-modules with High-Power-LEDs
Optical system	Rotational symmetric	asymmetric wide beam
Rated luminous flux	1000 - 2.500 lm [250 lm steps]	1000 - 3.500lm [250 lm steps]
Light efficiency	85 lm/W	up to 135 lm/W
Colour temperature	2.700 K 3.000 K	3.000 K oder 4.000 K
Colour rendering index (RA)	> 80	> 70
Dimming (Power control)	Optional power line control (50 % / 100 %), dimmprofile or DALI	
Rated lifetime at (ta) 30 °C	100.000h bei L80/B10	
Thermal management	✓	
Constant Light Output (CLO)	Optional	
ELECTRICAL PROPERTIES		
Rated power	7,6 - 31 W	
Electrical protection class	Class I / Class II	
Operating voltage / Frequence	220 - 240 V 50 - 60 Hz	
Surge protection	10 kV	
INSTALLATION REQUIREMENTS		
Application areas	Roads in residential areas, historical places, parks, paths	
Installation height	3 - 5 m	
Lighting classes	S	
Permissible ambient temperature (ta)	-25 °C to +35 °C	
OTHER PROPERTIES		
Certification	CE	