

HELLUX VGL 31-5 URS

Simple: Conversion kit for Hellux VGL 31-5

According to norms: Indicator and directional sign for the illumination of Pedestrian crossings according to DIN 67523

Safe: Positive contrast for better visibility of pedestrians



HELLUX

LUNUX GmbH


Mergenthalerstraße 6
30880 Laatzen

Telefon +49 (0)511 820 10-0
Telefax +49 (0)511 820 10-102

info@lunux-lighting.com
www.lunux-lighting.com

©LUNUX GmbH. The specifications may vary depending on the design. Reserve technical changes. All Rights Reserved.

HELLUX VGL 31-5 URS

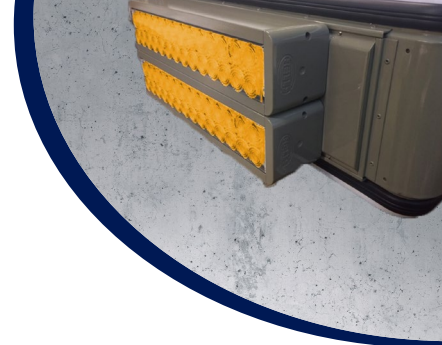

LIGHT HOUSING	
Material	Housing made of extruded aluminum profile
Colour (powder coating)	RAL 7003
Dimension (length x width x height)	1 Modul: 515 x 103 x 105 mm 2 Module: 515 x 207 x 105 mm
Weight	1 Modul: 2,7 kg 2 Module: 5,2 kg
IP Protection class	IP 65
Impact resistance	IK08
ILLUMINANT PROPERTIES	
Light source	1 or 2 eco-modules with 28 LEDs each
Optical system	PMMA single optics
Lamp Current	5.000 lm (4.000 K / 5.000 K) 6.000 lm amber (2.200 K)
Colour temperature	amber / 4.000 K / 5.000 K
Color rendering index (RA)	>70 (4.000 K / 5.000 K)
ELECTRICAL PROPERTIES	
Rated power	1 x 37,5W module over-path lighting 4/5K 2 x 29W module over-path lighting amber
Rated voltage / Frequence	220 - 240 V / 50 - 60Hz
INSTALLATION REQUIREMENTS	
Application areas	Pedestrian crossings
Light point height	5-6 m
FURTHER PROPERTIES	
Certificate	CE; VDE (module)